


A.238

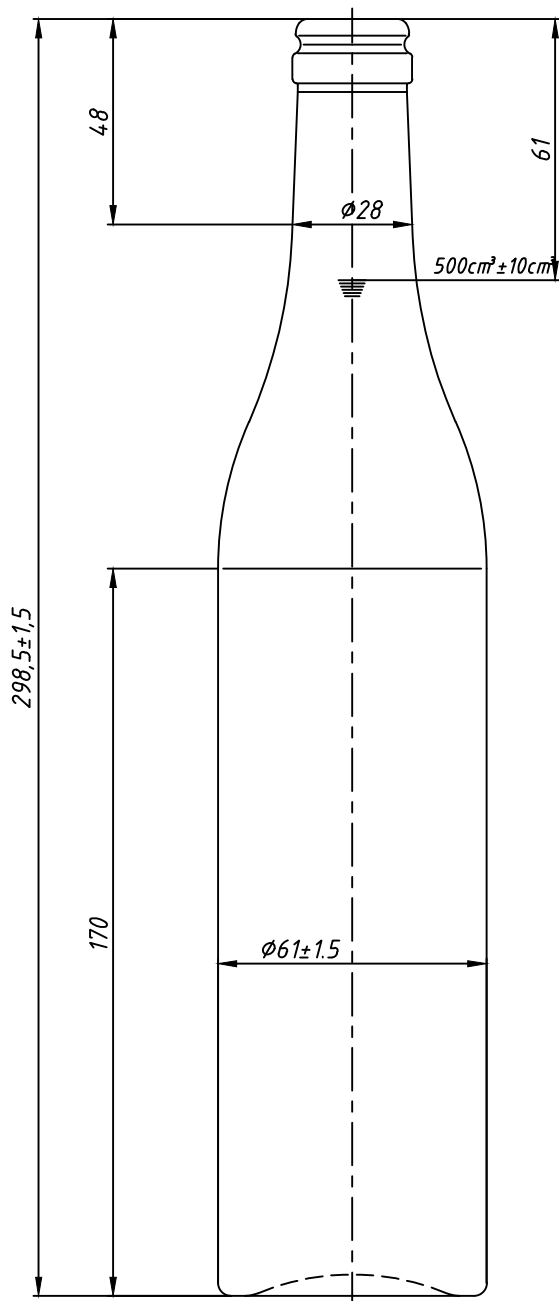

The controllable sizes
of a glass finish

$\phi 26,5^{+0,35}_{-0,20}$

$\phi 28 \pm 0,3$

$\phi 16^{+0,6}_{-0,4}$ should be on depth

3 mm from a finish end face

$\phi 15,1$ min in other part of a mouth

Finish type KH, GOST 10117.2-2001

Characteristics

Nominal capacity, cm^3 - 500

Full capacity, cm^3 - 520 ± 10

Weight recommended, g - 330

SM 195:1999 ; GOST 10117.1

Thickness of walls, at application of
hardening, not less - 1.2 mm

Thickness of a bottom at application of
hardening, not less, - 2.2 mm

Thermal stability, difference of temperatures,
not less, $^{\circ}\text{C}$ - 35

Internal hydrostatic pressure during 60 ± 2s
not less, kgf/cm^2 - 5

Maximum deviation

from a vertical axis not more, mm 4.2



on height, mm ± 1.5

on diameter of the body, mm ± 1.5

other sizes are given for manufacturing
set of forms

Agreed:

The packing scheme of the bottles in the pallet

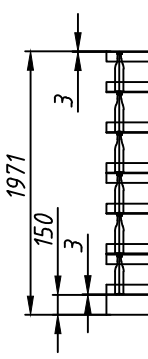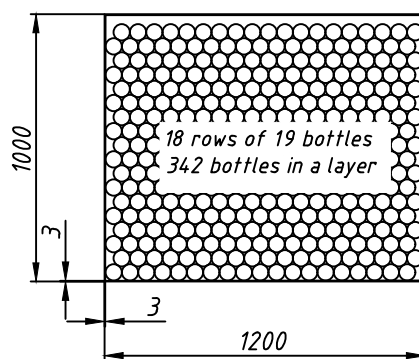

Quantity of layers: 6
Quantity of bottles in the pallet: 2052
Weight of the pallet, kg: 724
Roof: a cardboard
Cover: thermocontractable

A.238

Bottle
"Suvenir"-KH-500

Glass colourless

Letter	Weight	Scale
		1:1,25
Sheet	Sheets	1
FSC		