


A.294

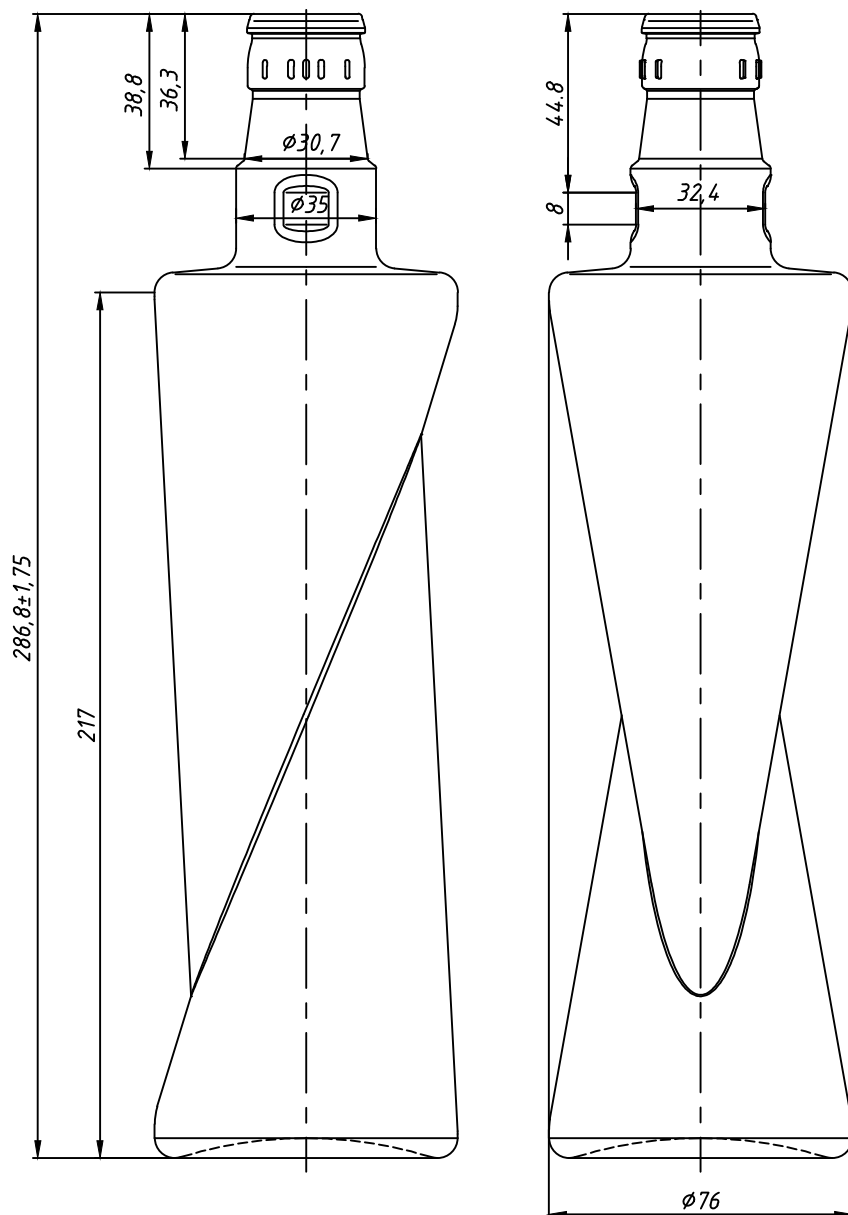

The controllable sizes
of a glass finish

$\phi 29,4 \pm 0,3$

$\phi 30,4 \pm 0,3$

$\phi 19 \pm 0,3$ to the depth 3 mm from the
top

$\phi 18 \text{ min}$ in the rest of the neck

Finish type КПМ-30-1

Characteristics

Nominal capacity, cm^3 - 500

Full capacity, cm^3 - 520 ± 10

Weight recommended, g - 522

SM 195:1999 ; GOST 10117.1

Thickness of walls not less-1.2 mm.

Thickness of a bottom not less-2.2 mm.


Thermal stability, difference of temperatures,
not less, $^{\circ}\text{C}$ - 35

Internal hydrostatic pressure during $60 \pm 2 \text{ s}$
not less, kgf/cm^2 - 2

Maximum deviations

from a vertical axis not more, mm 4
on height, mm $\pm 1,75$

The packing scheme of the bottles in the pallet

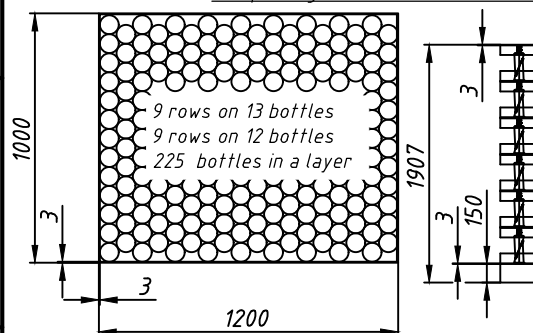

Quantity of layers: 6
Quantity of bottles in the pallet: 1350
Weight of the pallet, kg: 758
Roof: a cardboard
Cover: thermocontractable

Original accession N	The signature and date	The signature and date		The signature and date		The signature and date		The signature and date		
		Duplicate accession N		Duplicate accession N		Duplicate accession N		Duplicate accession N		
		Duplicate accession N		Duplicate accession N		Duplicate accession N		Duplicate accession N		
		Duplicate accession N		Duplicate accession N		Duplicate accession N		Duplicate accession N		