


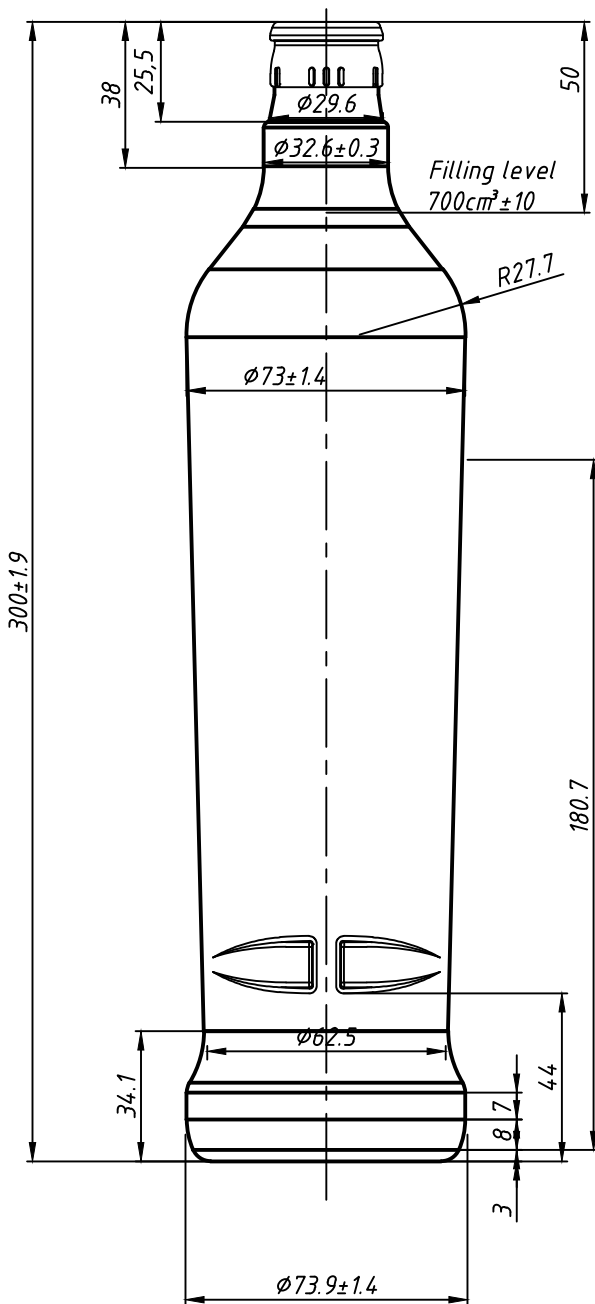

Characteristics

Nominal capacity in terms
of filling, cm³ -

700±10

Weight recommended, g -

480

Thickness of walls, not less-1.2 mm

Thickness of a bottom at application of
hardening, not less, -2.2 mm

Thermal stability, difference of temperatures,
not less, °C -40

Internal hydrostatic pressure not less,
kgf/cm²-5

Change	Letter	Document N	Signature	Date
Designed		Cosovschi P.		
Constr-r principal		Cosovschi P.		
Dir. of manuf.		Balataji I.		

A.

Bottle
"Alex - 700"

Flint

Letter	Weight	Scale
		1:1.4
Sheet	Sheets	1
FSC	®	