

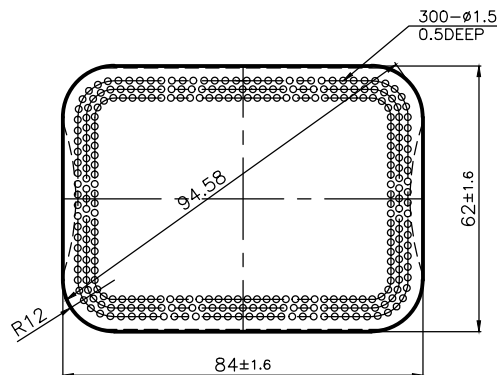
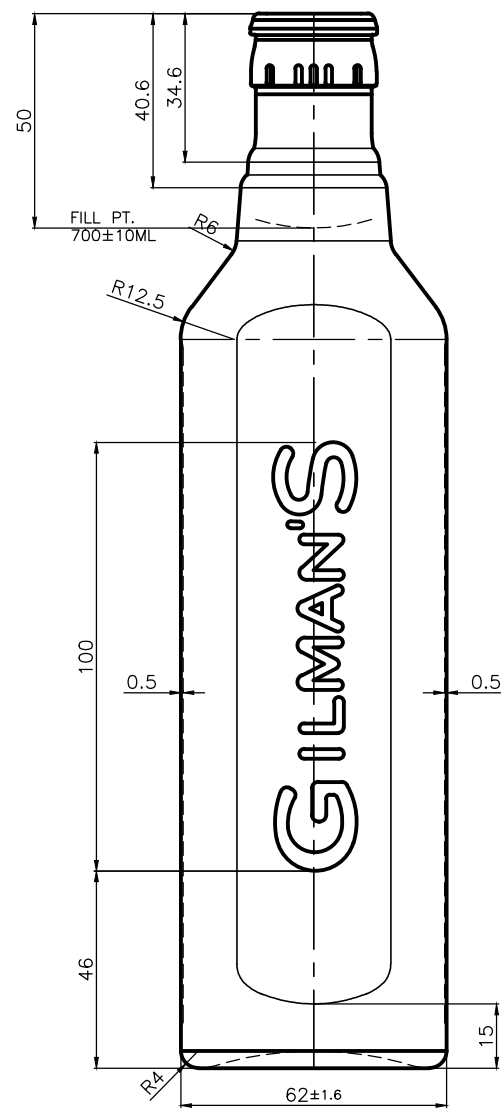
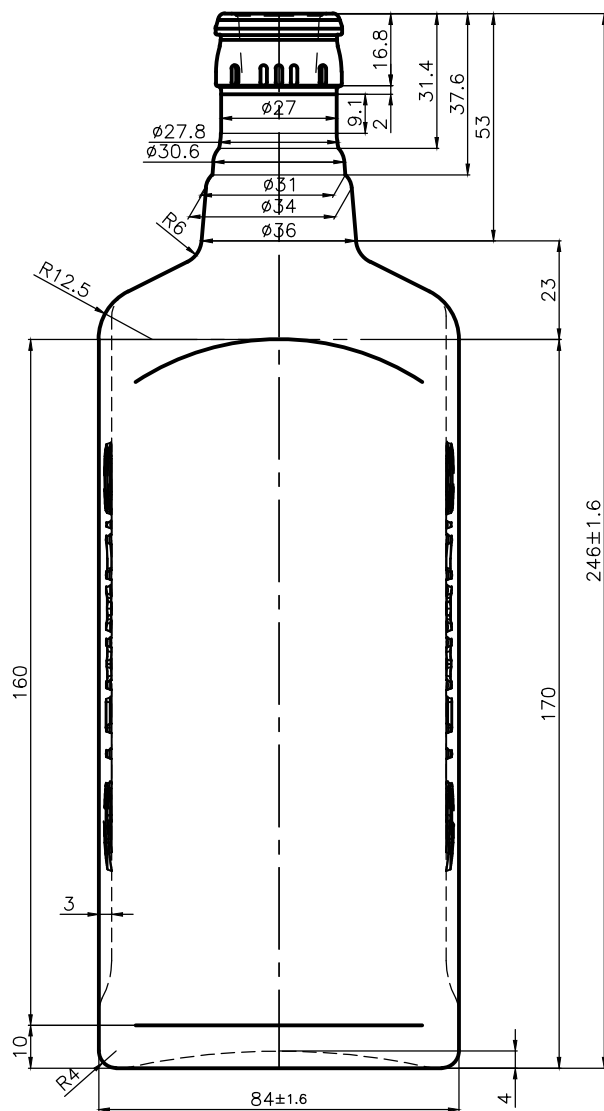


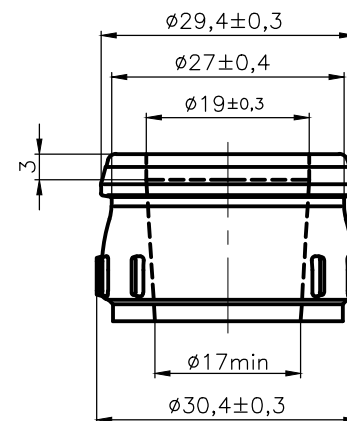

Characteristics
 Full capacity, cm³ - 700±10
 Weight recommended, g - 530
 Thickness of walls not less, not less - 1.0 mm
 Thickness of a bottom not less, not less, - 2.2 mm
 Thermal stability, difference of temperatures, not less, °C - 35
 Internal hydrostatic pressure during 60±2s not less, kgf/cm² - 2

Maximum deviations
 from a vertical axis not more, mm 3,2
 on height, mm ±1,6
 of the body, mm ±1,6

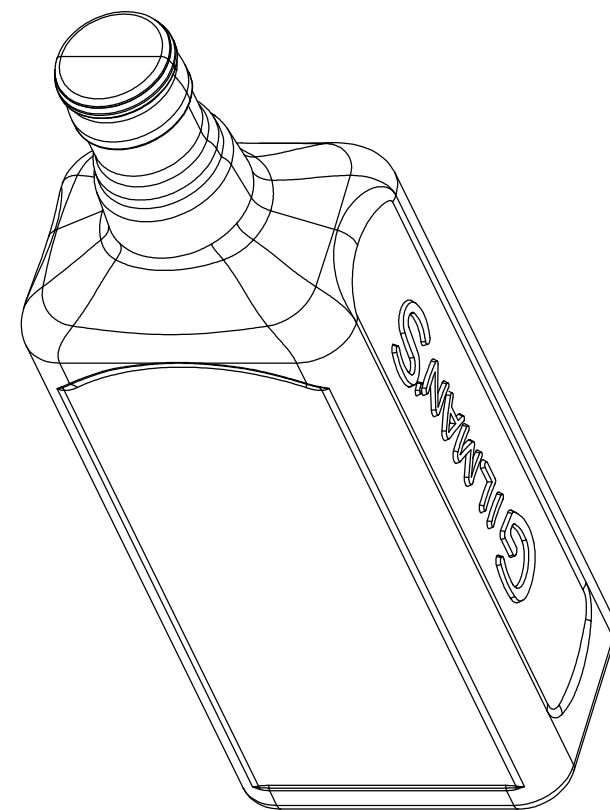

The controllable sizes
 of a glass finish
 Ø29,4±0,3
 Ø30,4±0,3
 Ø19±0,3 to the depth 3 mm from the top
 Ø17min in the rest of the neck
 Allowed on a diametrically located separate
 pair of anti-skid pins dimension Ø29.5min.

Finish type КПМ-30

				A.		
Chang. Letter	Document	Signature	Date	Bottle "Gilman'S"-КПМ-30-700		
Designed	Cosovschi	P.				
Constr-r principal	Cosovschi	P.		Flint		
Dir. of marketing	Baltaji I.					
				Letter	Weight	Scale
				Sheet 1	Sheets 2	
				FSC		