
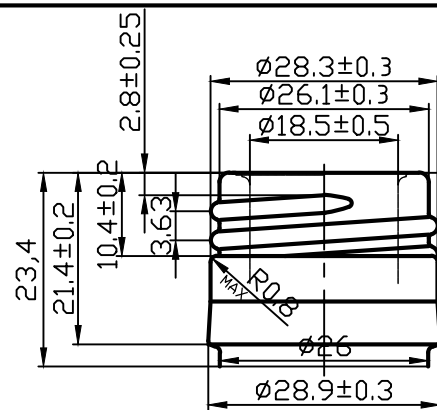


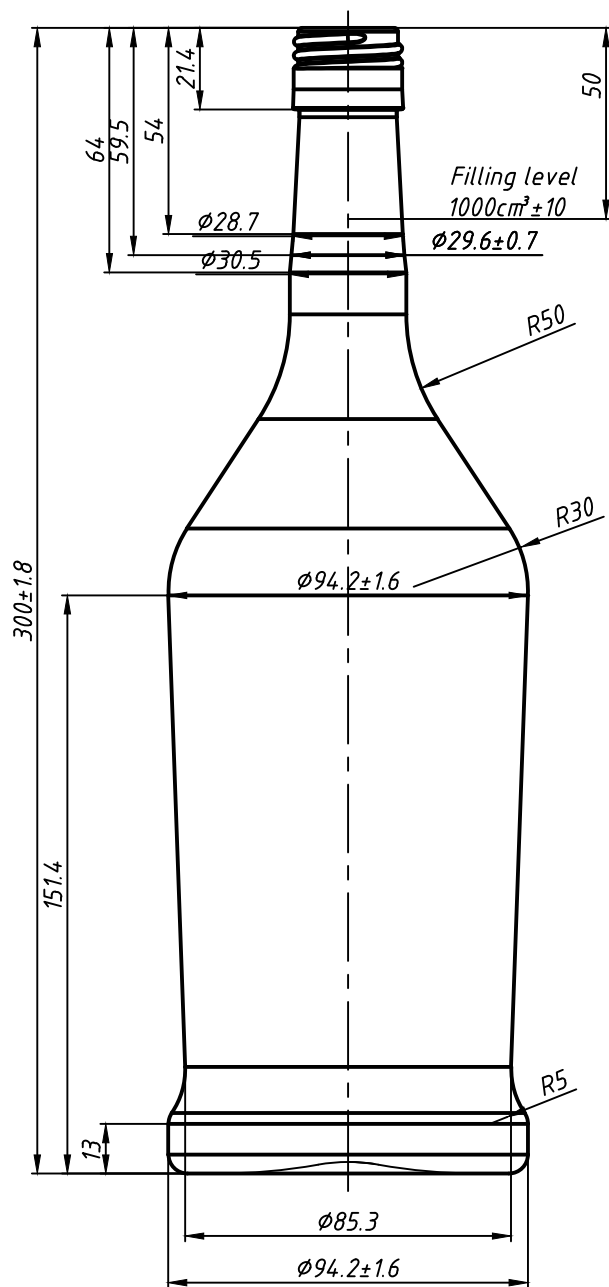

The controllable dimensions
of a glass finish :

$\phi 28,3 \pm 0,3$

$\phi 26,1 \pm 0,3$

$\phi 28,9 \pm 0,3$


$\phi 29,6 \pm 0,4$

$\phi 18,5 \pm 0,5$ should be on depth

10 mm from a finish end face

$\phi 16,1$ min in other part of a
mouth

Finish type BVS

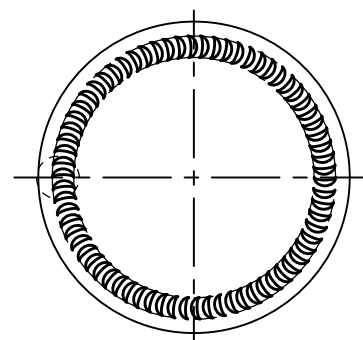

BOTTOM VIEW

Characteristics

Nominal capacity in terms
of filling, cm^3 -

1000 ± 10

Weight recommended, g -

500

Thickness of walls, not less - 1.2 mm

Thickness of a bottom at application of
hardening, not less, - 2.2 mm

Thermal stability, difference of temperatures,
not less, $^{\circ}\text{C}$ - 40

Internal hydrostatic pressure not less,
 kgf/cm^2 - 5

Change	Letter	Document N	Signature	Date
Designed		Cosovschi P.		
Constr-r principal		Cosovschi P.		
Dir. of manuf.		Balataji I.		

A.

Bottle
"Delli For-BVS-1000"

Flint

Letter	Weight	Scale
		1:1.4
Sheet	Sheets	1
FSC		