
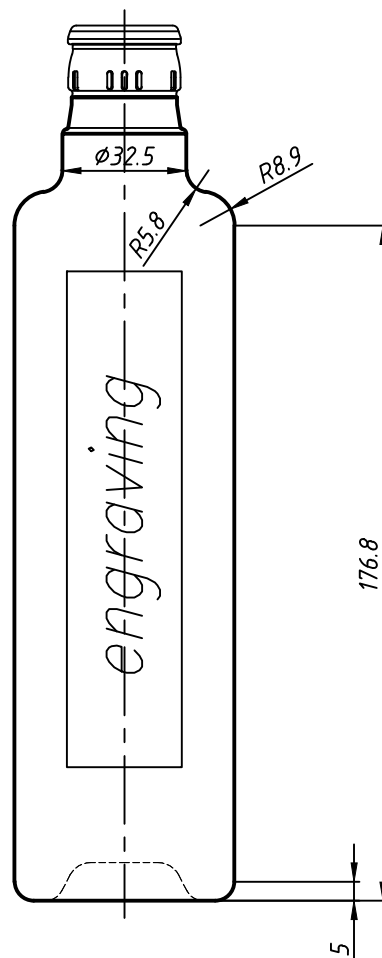
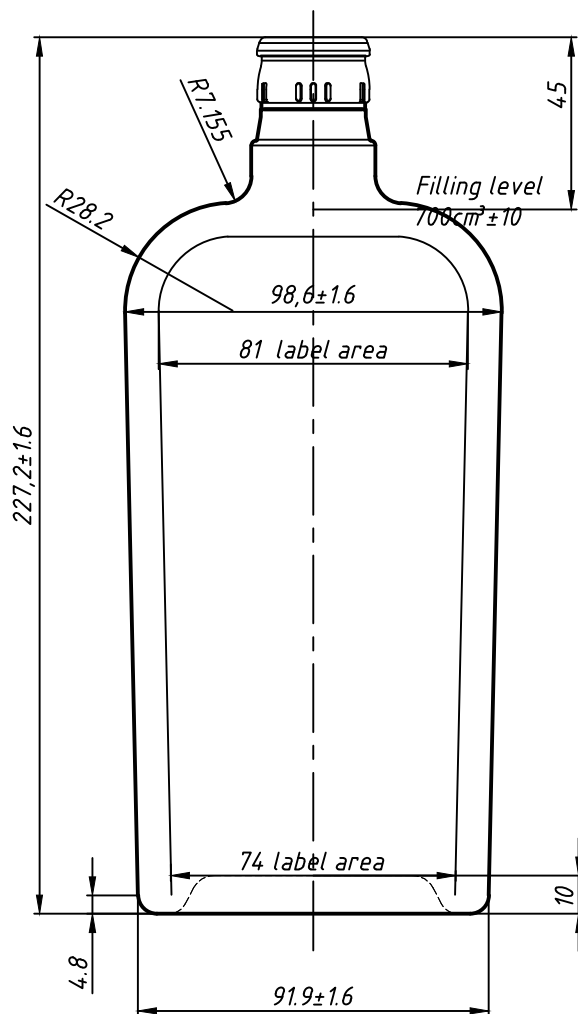


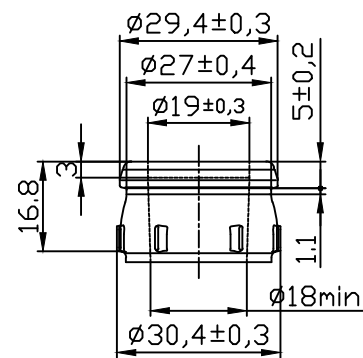

Characteristics

Nominal capacity in terms of filling, cm³ - 700 ± 10

Weight recommended, g - 600

Thickness of walls, not less - 1.2 mm

Thickness of a bottom at application of hardening, not less, - 2.2 mm

Thermal stability, difference of temperatures, not less, °C - 40

Internal hydrostatic pressure, not less, kgf/cm² - 5

Change	Letter	Document N	Signature	Date
Designed		Cosovschi P.		
Constr-r principal		Cosovschi P.		
Dir. of manuf.		Balataji I.		

A.

Bottle
"hodmoser-700"

Flint

Letter Weight Scale

1:1

Sheet Sheets 1

FSC

FSC

The signature and date

Instead of accession N Duplicate accession N

The signature and date

Original accession N