


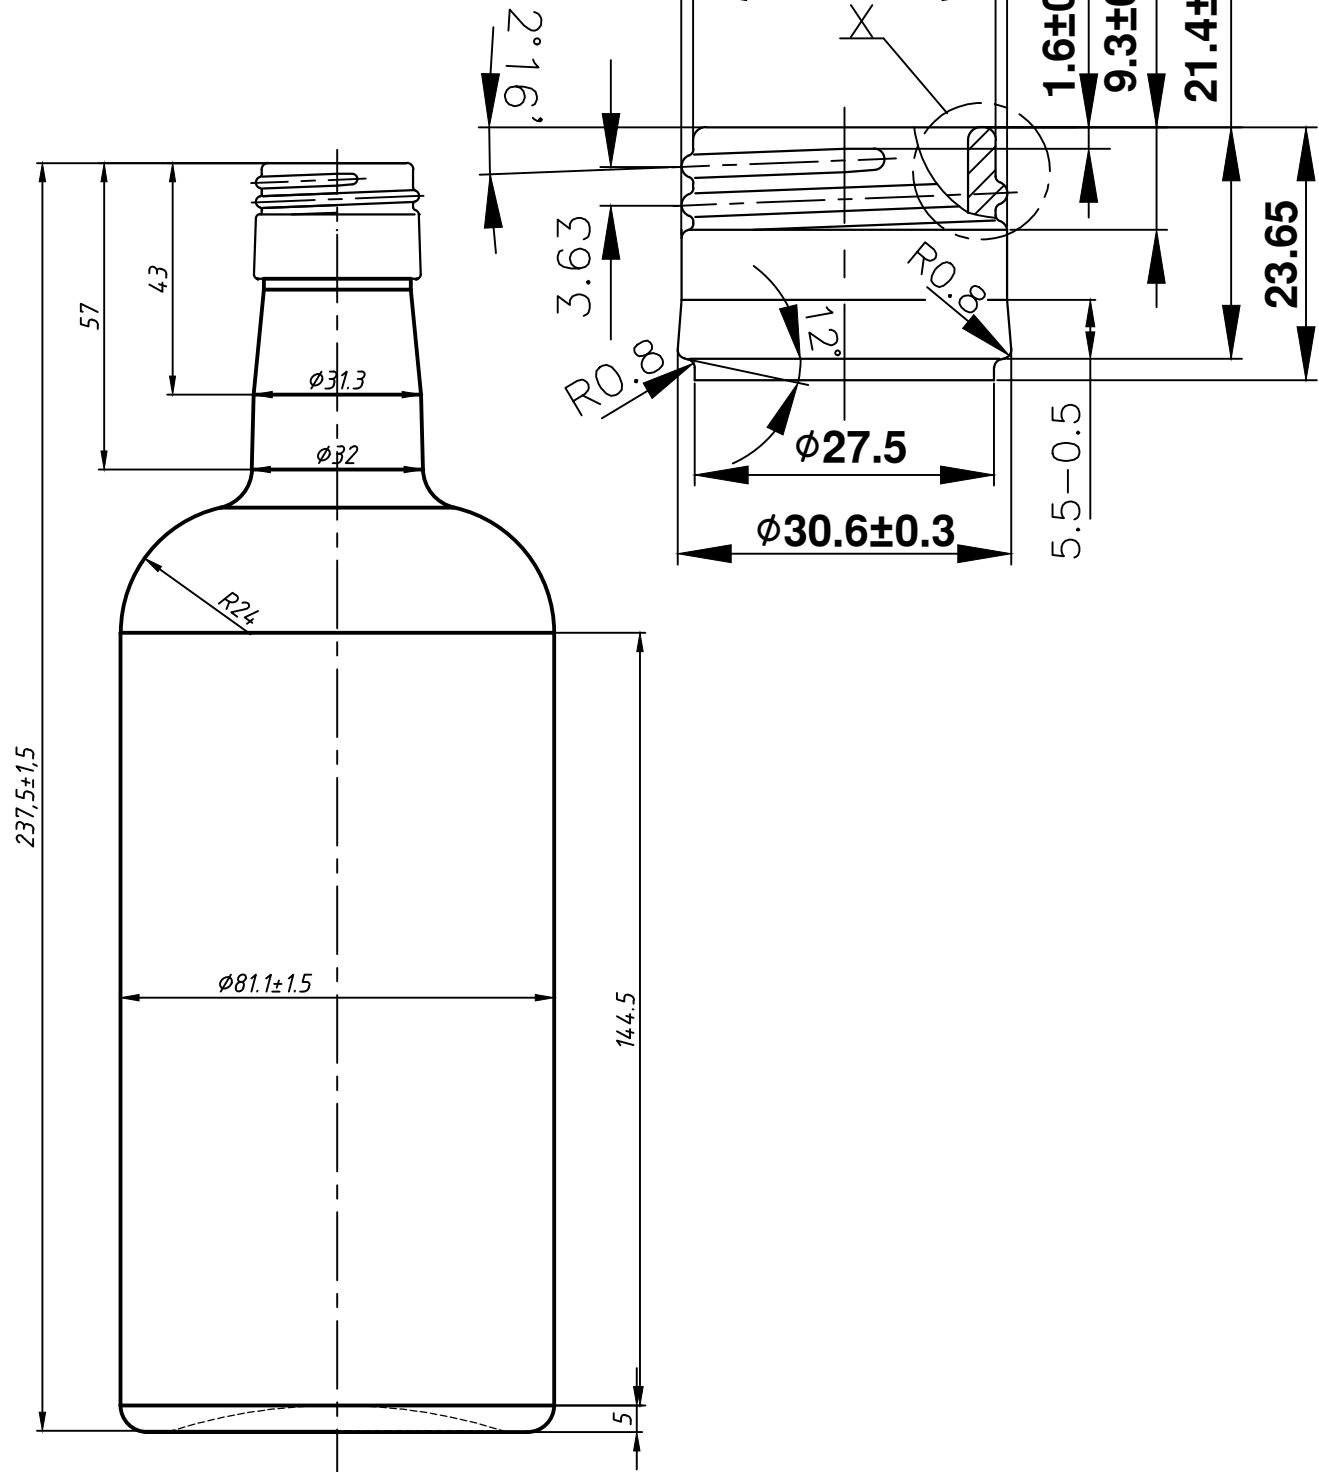

Characteristics

Nominal capacity in terms
of filling, cm³ -

700±10

Weight recommended, g -

460

Thickness of walls, not less-1.2 mm

Thickness of a bottom at application of
hardening, not less, -2.2 mm

Thermal stability, difference of temperatures,
not less, °C -40

Internal hydrostatic pressure, not less,
kgf/cm²-5

Change	Letter	Document N	Signature	Date
	Designed	Cosovschi P.		
	Constr-r principal	Cosovschi P.		
	Dir. of manuf.	Balataji I.		

A.

Bottle
"TERRA-B-30-5-700"

Flint

Letter	Weight	Scale
		1:1
Sheet	Sheets	1
FSC		®